

THE
LAUNDRY
EXPERT
FAMILY

TOLON





EXPERTISE IN LAUNDRY

With decades of hands-on experience,
we understand your needs and help you build the most efficient laundries.

A SOLUTION FOR ALL LAUNDRIES

We continuously develop better, diverse solutions to meet your needs.
Our machines are simple, reliable; and built to last—just like us.

HIGH-END AFTER-SALES SERVICE

Serving and finding solutions is how we ensure customers' success.
We take pride in our service and are dedicated to taking immediate action.

EVERLASTING CUSTOMER SATISFACTION

As a family business, our customers are part of our family.
We are here to make a lasting impact and serve you well.

Follow Us

   @tolonglobal

Stay Tuned

 **tolon.com**

WASHER EXTRACTORS

TWE 10 • 15 • 18



STANDARD FEATURES & BENEFITS

- Freestanding, high spin washer
- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in 5 compartment frontal dispenser
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front and top panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated shaft for longer life due to less friction on sealing surfaces
- Highly flexible and freely programmable control with advanced 7" colour display for easy operation and perfect management of your laundry business
- USB connection for quick data transfer and data editing on simple .csv format
- On screen photographic illustrated troubleshooting guide
- Clear status light indication for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles
- Plexi double glass protection against heat
- Accelerometer for perfect balancing
- Water inlet hoses
- Steam inlet hose

OPTIONS

- Dual heating (electric & steam) selectable through the control
- Stainless steel side panels
- Stainless steel back panel
- 3rd inlet valve for soft water
- High flow inlet valves for faster filling
- Pneumatic inlet valves for faster filling
- Pneumatic steam valve
- Chemical hold signal
- Integrated plinth to increase loading height and ensure ergonomic operation and fit linen carts (Height 160 mm to reach bottom loading door of 700 mm)

TOLON

WASHER EXTRACTORS

TWE 10 · 15 · 18

MODEL	UNIT	TWE 10	TWE 15	TWE 18
CAPACITY				
Dry load	kg	10	15	18
Performance	kg/h	15	23	27
Cycle duration	min	30-45	30-45	30-45
DRUM				
Drum diameter	mm	630	630	630
Drum depth	mm	330	490	580
Drum volume	l	103	153	181
Wash speed	rpm	43	43	43
Extraction speed	rpm	1012	1012	1012
G-force		360	360	360
DOOR				
Door opening Ø	mm	455	455	455
HEATING				
Electric	kW	9	15	18
Steam	bar	4-6	4-6	4-6
ELECTRIC				
Electric consumption*	kW/h	2,34	3,1	3,66
Motor	kW	1,5	2,2	3
STEAM				
Steam valve connection Ø	DN-BSP	15-½"	15-½"	15-½"
Steam pressure	kPa	400-600	400-600	400-600
Steam consumption	kg/cycle	5	7,5	9
AIR				
Air connection Ø	mm	optional / 8	optional / 8	optional / 8
WATER				
Inlet valve connection Ø	DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	kPa	200-400	200-400	200-400
Water flow	l/min	60	60	60
Water consumption*	cold	l/cycle	39	58
	hot	l/cycle	42	62
Drain valve connection Ø (outer)	mm	76	76	76
Drain flow	l/min	230	230	230
PROGRAMMABLE CONTROL				
18 default programmes (max. 99)		Std	Std	Std
7" colour, high-resolution LCD		Std	Std	Std
DIMENSIONS (WxDxH)				
Net - Standard	mm	880 x 976 x 1500	880 x 1136 x 1500	880 x 1226 x 1500
Net - with plinth	mm	880 x 976 x 1710	880 x 1136 x 1710	880 x 1226 x 1710
Packed - Standard	mm	930 x 1040 x 1570	930 x 1040 x 1570	930 x 1040 x 1570
Packed - with plinth	mm	930 x 1040 x 1780	930 x 1040 x 1780	930 x 1040 x 1780
WEIGHT				
Net - Standard	kg	438	463	476
Net - with plinth	kg	460	486	500
Packed - Standard	kg	456	483	499
Packed - with plinth	kg	481	508	524
SOUND PRESSURE				
Sound level	db(A)	55-65	55-65	55-65

* Consumption figures based on 'Eco 60°C' program (main wash, 2 rinses)

WASHER EXTRACTORS

TWE 24 · 28 · 40



STANDARD FEATURES & BENEFITS

- Freestanding, high spin washer
- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in 5 (TWE 24-28) or 6 (TWE 40) compartment frontal dispenser
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front and top panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated shaft for longer life due to less friction on sealing surfaces
- Highly flexible and freely programmable control with advanced 7" colour display for easy operation and perfect management of your laundry business
- USB connection in the front for quick data transfer and data editing on simple .csv format
- On screen photographic illustrated troubleshooting guide
- Clear status light indication for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles
- Plexi double glass protection against heat
- Accelerometer for perfect balancing
- High flow inlet valves for faster filling
- Water inlet hoses
- Steam inlet hose

OPTIONS

- Dual heating (electric & steam) selectable through the control
- Stainless steel side panels
- Stainless steel back panel
- 3rd inlet valve for soft water
- Pneumatic inlet valves for faster filling
- Pneumatic steam valve
- Second drain valve for water recovery
- Weighing cells to measure amount of linen and reduce the water, energy and detergent consumption accordingly
- Chemical hold signal

TOLON

WASHER EXTRACTORS

TWE 24 · 28 · 40

MODEL	UNIT	TWE 24	TWE 28	TWE 40
CAPACITY				
Dry load	kg	24	28	40
Performance	kg/h	36	42	60
Cycle duration	min	30-45	30-45	30-45
DRUM				
Drum diameter	mm	700	700	900
Drum depth	mm	630	720	575
Drum volume	l	242	277	365
Wash speed	rpm	37	37	35
Extraction speed	rpm	961	961	847
G-force		360	360	360
DOOR				
Door opening Ø	mm	455	455	560
HEATING				
Electric	kW	21	24	30
Steam	bar	4-6	4-6	4-6
ELECTRIC				
Electric consumption*	kW/h	4,9	5,6	8,93
Motor	kW	4	4	5,5
STEAM				
Steam valve connection Ø	DN-BSP	15-½"	15-½"	20-¾"
Steam pressure	kPa	400-600	400-600	400-600
Steam consumption	kg/cycle	12	14	20
AIR				
Air connection Ø	mm	optional / 8	optional / 8	optional / 8
WATER				
Inlet valve connection Ø	DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	kPa	200-400	200-400	200-400
Water flow	l/min	60	60	60
Water consumption*	cold	l/cycle	78	89
	hot	l/cycle	86	99
Drain valve connection Ø (outer)	mm	76	76	76
Drain flow	l/min	230	230	230
PROGRAMMABLE CONTROL				
18 default programmes (max. 99)		Std	Std	Std
7" colour, high-resolution LCD		Std	Std	Std
DIMENSIONS (WxDxH)				
Net - Standard	mm	975 x 1270 x 1565	975 x 1360 x 1565	1175 x 1405 x 1690
Net - with weighing	mm	975 x 1270 x 1590	975 x 1360 x 1590	1175 x 1405 x 1715
Packed - Standard	mm	1020 x 1350 x 1640	1020 x 1350 x 1640	1240 x 1480 x 1825
Packed - with weighing	mm	1020 x 1350 x 1720	1020 x 1350 x 1720	1240 x 1480 x 1905
WEIGHT				
Net - Standard	kg	710	800	1025
Packed - Standard	kg	729	819	1065
SOUND PRESSURE				
Sound level	db(A)	55-65	55-65	55-65

* Consumption figures based on 'Eco 60°C' program (main wash, 2 rinses)

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

WASHER EXTRACTORS

TWE 60 • 110



STANDARD FEATURES & BENEFITS

- Freestanding, high spin washer
- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid or powder detergent in 3 or 6 compartment frontal dispenser
- Standard equipped for automatic soap dosing
- Drum and tub, as well as the entire cabinet made of robust and durable high quality stainless steel AISI 304
- Ceramic coated shaft for longer life due to less friction on sealing surfaces
- Highly flexible and freely programmable control with advanced 7" colour display for easy operation and perfect management of your laundry business
- USB connection in the front for quick data transfer and data editing on simple .csv format
- On screen photographic illustrated troubleshooting guide
- Clear status light indication for easy and quick visual management
- Large 3" (TWE 60) or 4" (TWE 110) drain valve for fast evacuation and shorter cycles
- Accelerometer for perfect balancing
- High flow inlet valves for faster filling
- Water inlet hoses
- Steam inlet hose

OPTIONS

- Dual heating (electric & steam) selectable through the control
- Forward tilting
- Extra inlet valve for soft water
- Pneumatic inlet valves for faster filling, standard on TWE 110
- Pneumatic steam valve on TWE 60, standard on TWE 110
- Second drain valve for water recovery
- Weighing cells to measure amount of linen and reduce the water, energy and detergent consumption accordingly
- Chemical hold signal

TOLON

WASHER EXTRACTORS

TWE 60 • 110

MODEL	UNIT	TWE 60	TWE 110	
CAPACITY				
Dry load	kg	60	110	
Performance	kg/h	90	165	
Cycle duration	min	30-45	30-45	
DRUM				
Drum diameter	mm	1100	1300	
Drum depth	mm	610	830	
Drum volume	l	579	1101	
Wash speed	rpm	34	29	
Extraction speed	rpm	770	705	
G-force		360	360	
DOOR				
Door opening Ø	mm	550	675	
HEATING				
Electric	kW	30	60	
Steam	bar	4-6	4-6	
ELECTRIC				
Electric consumption*	kW/h	26,25	52,5	
Motor	kW	11	22	
STEAM				
Steam valve connection Ø	DN-BSP	25-1"	40-1½"	
Steam pressure	kPa	400-600	400-600	
Steam consumption	kg/cycle	28	50	
AIR				
Air connection Ø	mm	optional / 10	10	
WATER				
Inlet valve connection Ø	DN-BSP	2 x 25-1"	2 x 50-2"	
Water inlet (detergent) Ø	DN-BSP	1 x 25-1"	1 x 25-1"	
Water pressure	kPa	200-400	200-400	
Water flow	l/min	160	540	
Water consumption*	cold	l/cycle	175	310
	hot	l/cycle	232	395
Drain valve connection ø (outer)	mm	76	114	
Drain flow	l/min	230	600	
PROGRAMMABLE CONTROL				
18 default programmes (max. 99)		Std	Std	
7" colour, high-resolution LCD		Std	Std	
DIMENSIONS (WxDxH)				
Net - Standard	mm	1745 x 1570 x 1910	1910 x 2040 x 2060	
Net - with tilting	mm	1825 x 1605 x 2070	1990 x 2040 x 2245	
Packed - Standard	mm	1900 x 1650 x 2060	2000 x 2150 x 2200	
Packed - with tilting	mm	1900 x 1750 x 2220	2050 x 2300 x 2400	
WEIGHT				
Net - Standard	kg	1925	3950	
Net - with tilting	kg	2150	4025	
Packed - Standard	kg	2000	4110	
Packed - with tilting	kg	2225	4185	
SOUND PRESSURE				
Sound Level	db(A)	67-77	70-77	

* Consumption figures based on 'Eco 60°C' program (main wash, 2 rinses)

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

HYGIENE BARRIER WASHERS

TBW 63 • 120



STANDARD FEATURES & BENEFITS

- Freestanding, high spin barrier washer
- Easily accessible, ergonomic double-chamber drum
- 6 compartment frontal dispenser
- Standard equipped for automatic soap dosing
- 2 opposed doors for hygienic loading and unloading
- Shock absorbing chassis with airbag
- Low humidity with high spin speed
- Frequency controlled motor
- Robust drum and outer body made of CrNi
- Special design door locks stays closed during operation and ensures user safety
- USB port for data import, adding and updating programmes and on-screen photo troubleshooting guide
- Wide water outlet for fast water drain flow
- Shaft system with 2 special bearing
- Ceramic coated bearing house with increased durability

OPTIONS

- Water, electricity and detergent optimization by weighing system
- Pneumatic water and steam valves
- Dual heating options through control panel (electric and steam)
- 3rd inlet valve for soft water
- Water and steam inlet hoses
- Smart indicator light and audible warning system
- Reporting feature
- Control panel on front and back side
- Set-up for automatic chemical bonding

TOLON

HYGIENE BARRIER WASHERS

TBW 63 • 120

MODEL	UNIT	TBW 63	TBW 120
CAPACITY			
Dry load	kg	63	120
Performance	kg/h	95	180
Cycle duration	min	30-45	30-45
DRUM			
Drum diameter	mm	900	1100
Drum depth	mm	1000	1300
Drum volume	l	636	1235
Wash speed	rpm	38	35
Extraction speed	rpm	780	705
G-force	G	305	305
DOOR			
Door opening Ø	mm	580 x 450	770 x 540
HEATING			
Electric	kW	30	60
Steam	bar	4-6	4-6
ELECTRIC			
Electric consumption*	kW/h	25,5	52,5
Motor	kW	7,5	15
STEAM			
Steam valve connection Ø	DN-BSP	20-¾"	25-1"
Steam pressure	kPa	400-600	400-600
Steam consumption	kg/cycle	28	50
AIR			
Air connection Ø	mm	10	10
WATER			
Inlet valve connection Ø	DN-BSP	2 x 20-¾"	2 x 50-2"
Water inlet (detergent) Ø	DN-BSP	1 x 20-¾"	1 x 25-1"
Water pressure	kPa	200-400	200-400
Water consumption*	cold	l/cycle	175
	hot	l/cycle	232
Drain flow	l/min	230	600
PROGRAMMABLE CONTROL			
18 default programs (max. 99)	mm	16 Default Programs (Max. 99)	
7" color, high-resolution LCD	mm	Std	Std
DIMENSIONS (WxDxH)			
Net - Standard	mm	1943 x 1400 x 1831	2424 x 1609 x 2060
Packed - Standard	mm	2000 x 1500 x 1900	2550 x 1650 x 2200
WEIGHT			
Net - Standard	kg	1500	2450
SOUND PRESSURE			
Sound level	kg	63-79	63-79

* Consumption figures based on "Eco 60°C" program (main wash, 2 rinses)

TUMBLE DRYERS

TTD 28 · 40 · 60 · 110



STANDARD FEATURES & BENEFITS

- Industrial tumble dryer
- Stainless steel drum for long life and to avoid corrosion
- Fully insulated, energy-saving drum
- Reversing drum for efficient drying of large items
- Wide hatch sliding doors for easy loading & unloading with window
- Large and easily accessible and removable stainless steel filter with window for visual management
- Hinged lint filter door for easy opening & cleaning
- Flexible and freely programmable control with large display for easy operation and perfect management of your laundry business
- Clear status light indication for easy and quick visual management
- Adjustable feet (fixed on TTD 110)
- Forward tilting on TTD 110 for easy unloading
- Sprinkler device for fire suppression on all gas tumblers
- Sail switch on all models for efficient drying
- Electric solenoid valve on TTD 28 · 40 · 60
- Pneumatic steam valve on TTD 110
- Fresh air intake flap for cool down on TTD 110 steam
- Standard Inverter drive

OPTIONS

- Residual moisture control + variable speed for perfect drying of delicate linen
- Pneumatic steam valve on TTD 28 · 40 · 60
- Fresh air intake flap for fast cool down on TTD 28 · 40 · 60
- Adjustable speed of the drum
- Heat recirculation for more efficient drying and lower energy consumption
- Sprinkler device for fire suppression on steam heated models
- Steam inlet hose
- Stainless steel high pressure steam coil (max. 12 bar)
- Infrared sensor

TOLON

TUMBLE DRYERS TTD

TTD 28 · 40 · 60 · 110

MODEL		UNIT	TTD 28	TTD 40	TTD 60	TTD 110
CAPACITY						
Dry load		kg	28	40	60	110
Performance		kg/h	48	68	102	165
Evaporation	gas	l/h	28	40	62	107
	steam	l/h	24	34	53	92
	electric	l/h	21	29	45	-
Cycle duration	gas	min	30-35	30-35	30-35	40
	steam	min	35-40	35-40	35-40	35-40
	electric	min	40-45	40-45	40-45	-
DRUM						
Drum diameter		mm	980	1230	1230	1362
Drum depth		mm	700	680	957	1620
Drum volume		l	528	808	1137	2360
DOOR (SLIDING)						
Door opening Ø		mm	600	715	715	885
HEATING POWER						
Electrical heating element		kW	31,2	36	45	-
Steam heat exchanger	6 Bar	kW	28	45	50	120
		Btu	95540	153546	170607	409457
	12 Bar	kW	30	50	60	135
		Btu	102364	170607	204728	460639
Gas burner		kW	44	55,24	71,12	150,27
		Btu	150134	188487	242672	512743
ELECTRIC RATING						
Drum motor power		kW	0,55	1,1	1,1	5,5
Fan motor power	electric	kW	1,1	2,2	2,2	7,5
	steam/gas	kW	1,1	3	3	7,5
ELECTRIC						
Electric consumption ¹	electric ²	kW/h	32	39	48	-
	steam	kW/h	1	1,15	1,25	8
	gas	kW/h	1	1,15	1,25	8
STEAM DATA						
Steam valve connection Ø		DN-BSP	25-1"	25-1"	25-1"	50-2"
Steam condenser Ø		DN-BSP	20-¾"	25-1"	25-1"	25-1"
Steam pressure	6 Bar	kPa	400-600	400-600	400-600	400-600
	12 Bar	kPa	1000-1200	1000-1200	1000-1200	1000-1200
Steam consumption ¹		kg/cycle	40	80	120	180
GAS DATA						
Gas connection Ø		DN-BSP	15-½"	15-½"	15-½"	15-½"
Gas pressure	natural gas	mbar	20-50	20-50	20-50	20-50
	LPG	mbar	30-60	30-60	30-60	30-60
Gas consumption (per hour) ¹	natural gas	m³/h	4,5	5,71	7,35	15,53
		Btu/h	150134	188487	242672	512743
	LPG	m³/h	1,7	2,1	2,8	6,3
		Btu/h	150134	199269	256593	552767
Gas consumption (per cycle) ¹	natural gas	m³/cycle	2,5	2,99	3,8	9,61
		Btu/cycle	82488	98645	125362	317056
	LPG	m³/cycle	0,92	1,1	1,45	3,7
		Btu/cycle	82488	103046	131367	324153
AIR DATA						
Air connection Ø		mm	8	8	8	10
Air consumption		l/min	60	60	60	120
Air pressure		bar	6-8	6-8	6-8	6-8

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

TUMBLE DRYERS TTD

TTD 20 · 28 · 40 · 60 · 110

SPRINKLER DATA

Water connection Ø	BSP	¾"	¾"	¾"	¾"
Water pressure	mbar	2-4	2-4	2-4	2-4
Water flow capacity (min.)	l/h	1000	1000	1000	1000

EXHAUST DATA

Exhaust connection Ø	mm	200	200	200	300
Airflow	electric	m³/h	1750	2500	2600
	steam/gas	m³/h	1800	2750	2800

PROGRAMMABLE CONTROL

3 default programmes (max 20)	Std	Std	Std	Std
LCD display 80 x 50 mm	Std	Std	Std	Std

DIMENSIONS (WxDxH)

Net	electric	mm	1166 x 1522 x 1971	1416 x 1528 x 2191	1416 x 1803 x 2191	-
	steam	mm	1166 x 1522 x 1977	1416 x 1528 x 2376	1416 x 1803 x 2376	1580 x 2730 x 2700
	gas	mm	1166 x 1522 x 2009	1416 x 1528 x 2229	1416 x 1803 x 2229	1580 x 2730 x 2500
Packed	electric	mm	1198 x 1590 x 1996	1447 x 1595 x 2215	1447 x 1870 x 2215	-
	steam	mm	1198 x 1590 x 2002	1447 x 1595 x 2301	1447 x 1870 x 2301	1700 x 2760 x 2420 700 x 1700 x 650
	gas	mm	1198 x 1590 x 2033	1447 x 1595 x 2254	1447 x 1870 x 2254	1700 x 2760 x 2420 710 x 970 x 1330

WEIGHT

Net	electric	kg	460	615	665	-
	steam	kg	455	690	730	2075
	gas	kg	475	665	705	1840
Packed	electric	kg	485	640	695	-
	steam	kg	480	715	760	2275 (1975 + 300)
	gas	kg	502	690	735	2060 (1975 + 85)
Steam heat exchanger	net	kg		included		275
	packed	kg				300
Combustion chamber	net	kg		included		40
	packed	kg				85

SOUND PRESSURE

Sound level	db(A)	< 63,7	< 63,7	< 63,7	< 63,7
-------------	-------	--------	--------	--------	--------

¹ Consumption figures with 100% cotton and 50% initial moisture dried to 0%

² Measured on 400V

TOLON

WHERE WE ARE

Türkiye | Headquarters and Factory
Belgium | International Office and Warehouse
USA | Americas Office and Warehouse
UAE | Sales Entity
Brazil | Sales Entity

GLOBAL DISTRIBUTOR NETWORK



VENDED WASHER EXTRACTORS

TWE 10 • 15 • 18



STANDARD FEATURES & BENEFITS

- Freestanding, high spin washer
- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in 5 compartment frontal dispenser
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front and top panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated shaft for longer life due to less friction on sealing surfaces
- Prepared for single coin drop
- Prepared for card payment
- Highly flexible and freely programmable control with advanced 7" colour display for easy operation and perfect management of your laundry business
- USB connection for quick data transfer and data editing on simple .csv format
- On screen photographic illustrated troubleshooting guide
- Clear status light indication for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles
- Plexi double glass protection against heat
- Accelerometer for perfect balancing
- Water inlet hoses
- Steam inlet hose

OPTIONS

- Dual heating (electric & steam) selectable through the control
- Stainless steel side panels
- Stainless steel back panel
- 3rd inlet valve for soft water
- High flow inlet valves for faster filling
- Pneumatic inlet valves for faster filling
- Pneumatic steam valve
- Chemical hold signal
- Integrated plinth to increase loading height and ensure ergonomic operation and fit linen carts (Height 160 mm to reach bottom loading door of 700 mm)
- Coin drop and collection box
- Electronic coin drop
- Network capability for tracking customers and P&L reporting

TOLON

VENDED WASHER EXTRACTORS

TWE 10 • 15 • 18

MODEL	UNIT	TWE 10	TWE 15	TWE 18
CAPACITY				
Dry load	kg	10	15	18
Performance	kg/h	15	23	27
Cycle duration	min	30-45	30-45	30-45
DRUM				
Drum diameter	mm	630	630	630
Drum depth	mm	330	490	580
Drum volume	l	103	153	181
Wash speed	rpm	43	43	43
Extraction speed	rpm	1012	1012	1012
G-force		360	360	360
DOOR				
Door opening Ø	mm	455	455	455
HEATING				
Electric	kW	9	15	18
Steam	bar	4-6	4-6	4-6
ELECTRIC				
Electric consumption*	kW/h	2,34	3,1	3,66
Motor	kW	1,5	2,2	3
STEAM				
Steam valve connection Ø	DN-BSP	15-½"	15-½"	15-½"
Steam pressure	kPa	400-600	400-600	400-600
Steam consumption	kg/cycle	5	7,5	9
AIR				
Air connection Ø	mm	optional / 8	optional / 8	optional / 8
WATER				
Inlet valve connection Ø	DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	kPa	200-400	200-400	200-400
Water flow	l/min	60	60	60
Water consumption*	cold	l/cycle	39	58
	hot	l/cycle	42	62
Drain valve connection Ø (outer)	mm	76	76	76
Drain flow	l/min	230	230	230
PROGRAMMABLE CONTROL				
18 default programmes (max. 99)		Std	Std	Std
7" colour, high-resolution LCD		Std	Std	Std
DIMENSIONS (WxDxH)				
Net - Standard	mm	880 x 976 x 1500	880 x 1136 x 1500	880 x 1226 x 1500
Net - with plinth	mm	880 x 976 x 1710	880 x 1136 x 1710	880 x 1226 x 1710
Packed - Standard	mm	930 x 1040 x 1570	930 x 1040 x 1570	930 x 1040 x 1570
Packed - with plinth	mm	930 x 1040 x 1780	930 x 1040 x 1780	930 x 1040 x 1780
WEIGHT				
Net - Standard	kg	438	463	476
Net - with plinth	kg	460	486	500
Packed - Standard	kg	456	483	499
Packed - with plinth	kg	481	508	524
SOUND PRESSURE				
Sound level	db(A)	55-65	55-65	55-65

* Consumption figures based on 'Eco 60°C' program (main wash, 2 rinses)

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

VENDED WASHER EXTRACTORS

TWE 24 · 28 · 40



STANDARD FEATURES & BENEFITS

- Freestanding, high spin washer
- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in 5 (TWE 24-28) or 6 (TWE 40) compartment frontal dispenser
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front and top panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated shaft for longer life due to less friction on sealing surfaces
- Prepared for single coin drop
- Prepared for card payment
- Highly flexible and freely programmable control with advanced 7" colour display for easy operation and perfect management of your laundry business
- USB connection in the front for quick data transfer and data editing on simple .csv format
- On screen photographic illustrated troubleshooting guide
- Clear status light indication for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles
- Plexi double glass protection against heat
- Accelerometer for perfect balancing
- High flow inlet valves for faster filling
- Water inlet hoses
- Steam inlet hose

OPTIONS

- Dual heating (electric & steam) selectable through the control
- Stainless steel side panels
- Stainless steel back panel
- 3rd inlet valve for soft water
- Pneumatic inlet valves for faster filling
- Pneumatic steam valve
- Second drain valve for water recovery
- Weighing cells to measure amount of linen and reduce the water, energy and detergent consumption accordingly
- Chemical hold signal
- Coin drop and collection box
- Electronic coin drop
- Network capability for tracking customers and P&L reporting

TOLON

VENDED WASHER EXTRACTORS

TWE 24 • 28 • 40

MODEL	UNIT	TWE 24	TWE 28	TWE 40
CAPACITY				
Dry load	kg	24	28	40
Performance	kg/h	36	42	60
Cycle duration	min	30-45	30-45	30-45
DRUM				
Drum diameter	mm	700	700	900
Drum depth	mm	630	720	575
Drum volume	l	242	277	365
Wash speed	rpm	37	37	35
Extraction speed	rpm	961	961	847
G-force		360	360	360
DOOR				
Door opening Ø	mm	455	455	560
HEATING				
Electric	kW	21	24	30
Steam	bar	4-6	4-6	4-6
ELECTRIC				
Electric consumption*	kW/h	4,9	5,6	8,93
Motor	kW	4	4	5,5
STEAM				
Steam valve connection Ø	DN-BSP	15-½"	15-½"	20-¾"
Steam pressure	kPa	400-600	400-600	400-600
Steam consumption	kg/cycle	12	14	20
AIR				
Air connection Ø	mm	optional / 8	optional / 8	optional / 8
WATER				
Inlet valve connection Ø	DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	kPa	200-400	200-400	200-400
Water flow	l/min	60	60	60
Water consumption*	cold	l/cycle	78	89
	hot	l/cycle	86	99
Drain valve connection Ø (outer)	mm	76	76	76
Drain flow	l/min	230	230	230
PROGRAMMABLE CONTROL				
18 default programmes (max. 99)		Std	Std	Std
7" colour, high-resolution LCD		Std	Std	Std
DIMENSIONS (WxDxH)				
Net - Standard	mm	975 x 1270 x 1565	975 x 1360 x 1565	1175 x 1405 x 1690
Net - with weighing	mm	975 x 1270 x 1590	975 x 1360 x 1590	1175 x 1405 x 1715
Packed - Standard	mm	1020 x 1350 x 1640	1020 x 1350 x 1640	1240 x 1480 x 1825
Packed - with weighing	mm	1020 x 1350 x 1720	1020 x 1350 x 1720	1240 x 1480 x 1905
WEIGHT				
Net - Standard	kg	710	800	1025
Packed - Standard	kg	729	819	1065
SOUND PRESSURE				
Sound level	db(A)	55-65	55-65	55-65

* Consumption figures based on 'Eco 60°C' program (main wash, 2 rinses)

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

TUMBLE DRYERS

TRD 11 • 16 • 23



STANDARD FEATURES & BENEFITS

- Tumble dryer in skin plate, cream color
- Big loading door (opening of 180°)
- Direct drive through a gearbox, no pulley
- Time and temperature selection
- Reverse drum: All models offer the reverse turning of the drum
- Drum in galvanised steel
- Digital control. Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- Radial airflow circuit
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle
- Models available in electric, gas or steam heating
- Self-Service: Digital range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepaid card systems. Electric and gas heated models

OPTIONS

- Moisture control
- Fire suppression system (for all heating types)
- Double doorglass
- Stainless steel drum with mixed axial-radial flow and punched drum holes
- Stainless steel body
- Stainless steel front panel
- Low pressure steam battery
- Opposite door opening
- Lint filter with dia. 0,6 or 1,2 mm mesh
- Wooden box packing
- Special voltages
- Mechanical meter for coin / token
- Electronic coin kit

TOLON

TUMBLE DRYERS

TRD 11 • 16 • 23

MODEL	UNIT	TRD 11	TRD 16	TRD 23			
Capacity 1/18	kg	12	18	26			
Capacity 1/20	kg	10,5	16,5	23			
Hourly Out put *	kg/h	28,6	31,9	40,6			
Evaporation capacity *	l/h	14,5	16,3	20,4			
DRUM							
Ø Drum	mm	750	750	855			
Ø Door	mm	574	574	574			
Center door height	mm	976	976	1.030			
Bottom door height	mm	689	689	743			
Drum length	mm	475	746	800			
Drum volume	l	210	330	460			
POWER							
Drum motor	kW	0,37	0,37	0,37			
Fan motor	kW	0,25	0,25	0,55			
Electric heating	kW	12	18	24			
Total electric power	kW	12,67	18,67	24,97			
Gas heating	kW	20,51	20,51	31			
Steam heating	kW	30	30	49,2			
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tension 230V- I + N + T	N° x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	N° x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V- III + N + T	N° x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"		1"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"		1"	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	mm	785 / 865		785 / 865		890 / 970	
Net Depth / Gross Depth	mm	840 / 940		1.110 / 1.210		1.245 / 1.345	
Net Height / Gross Height	mm	1.694 / 1.840		1.694 / 1.840		1.812 / 1.940	
Net weight / Gross weight	kg	172 / 180		187 / 200		210 / 230	
OTHERS							
Max airflow	m³/h	850		850		1.200	
Ø Fume exhaust	mm	200		200		200	
Sound level	dB	64		64		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

TUMBLE DRYERS

TRD 28 · 33



STANDARD FEATURES & BENEFITS

- Tumble dryer in skin plate, cream color
- Big loading door (opening of 180°)
- Direct drive through a gearbox, no pulley
- Time and temperature selection
- Reverse drum: All models offer the reverse turning of the drum.
- Drum in galvanised steel.
- Digital control. Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- Radial airflow circuit.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- Self-Service: Digital range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepaid card systems. Electric and gas heated models.

OPTIONS

- Moisture control
- Fire suppression system (for all heating types)
- Double doorglass
- Stainless steel drum with mixed axial-radial flow and punched drum holes
- Stainless steel body
- Stainless steel front panel
- Low pressure steam battery
- Opposite door opening
- Lint filter with dia. 0,6 or 1,2 mm mesh
- Wooden box packing
- Special voltages
- Mechanical meter for coin / token
- Electronic coin kit

TOLON

TUMBLE DRYERS

TRD 28 · 33

MODEL	UNIT	TRD 28		TRD 33	
Capacity 1/18	kg	31		37	
Capacity 1/20	kg	27,5		33	
Hourly Out put *	kg/h	59,3		63,9	
Evaporation capacity *	l/h	30,9		32,1	
DRUM					
Ø Drum	mm	947		947	
Ø Door	mm	802		802	
Center door height	mm	1.040		1.040	
Bottom door height	mm	640		640	
Drum length	mm	780		936	
Drum volume	l	550		660	
POWER					
Drum motor	kW	0,55		0,55	
Fan motor	kW	0,55		0,55	
Electric heating	kW	30		36	
Total electric power	kW	31,15		37,15	
Gas heating	kW	41		41	
Steam heating	kW	50,1		50,1	
CONNECTIONS					
		ELECTRICAL - STEAM / GAS		ELECTRICAL - STEAM / GAS	
Tension 230V- I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	N° x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V- III + N + T	N° x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	985 / 1.065		985 / 1.065	
Net Depth / Gross Depth	mm	1.054 / 1.154		1.210 / 1.310	
Net Height / Gross Height	mm	1946 / 2.080		1946 / 2.080	
Net weight / Gross weight	kg	230 / 260		260 / 285	
OTHERS					
Max airflow	m³/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

TUMBLE DRYERS

TRDS 11 • 16



STANDARD FEATURES & BENEFITS

- Construction in skinplate, cream color
- Big loading door (opening of 180°)
- Direct drive through a gearbox, no pulley
- Digital control. Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process
- Reverse drum: All models offer the reverse turning of the drum
- Galvanized steel drum standard
- New filter drawer with wide surface and improved airflow. Filter grid is standard 0,6mm in stack dryers
- Cool Down: Anti-wrinkle at the end of cycle
- Models available in electric or gas
- Self-service versions: to connect to a central pay or with 2 coiners as it can be ordered with 2 coin kits + boxes, and there is also a token kit to be ordered with the token box

OPTIONS

- Moisture control
- Fire suppression system (for all heating types)
- Double doorglass
- Stainless steel drum with mixed axial-radial flow and punched drum holes
- Stainless steel body
- Stainless steel front panel
- Opposite door opening
- Lint filter with dia. 0,6 or 1,2 mm mesh
- Wooden box packing
- Special voltages
- Mechanical meter for coin / token
- Electronic coin kit

TOLON

TUMBLE DRYERS


TRDS 11 · 16

MODEL	UNIT	TRDS 11		TRDS 16	
Capacity 1/18	kg	24		36	
Capacity 1/20	kg	21		33	
Hourly Out put *	kg/h	36		53	
Evaporation capacity *	l/h	16,5		18,6	
DRUM					
Ø Drum	mm	750		855	
Ø Door	mm	574		574	
Center door height	mm	547 / 1.522		547 / 1.522	
Bottom door height	mm	260 / 1.235		260 / 1.235	
Drum length	mm	475		746	
Drum volume	l	210		330	
POWER					
Drum motor	kW	0,37 x 2		0,37 x 2	
Fan motor	kW	0,25 x 2		0,25 x 2	
Electric heating	kW	12 x 2		12 x 2	
Total electric power	kW	25,34		25,34	
Gas heating	kW	12 x 2		12 x 2	
CONNECTIONS					
		ELECTRICAL / GAS		ELECTRICAL / GAS	
Tension 230V- I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V- III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	kg	260 / 268		290 / 303	
OTHERS					
Max airflow	m³/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

IRONERS

TFI 3516 · 3521

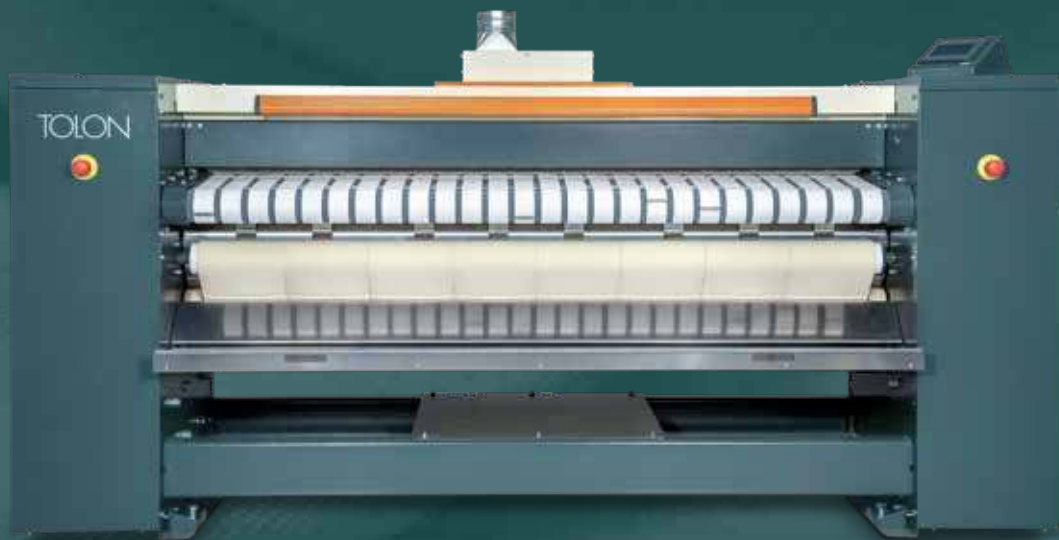

STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Gas or electric heating
- Extended heat transfer path
- Large surface contact with linen
- Roll standard with chrome surface coating for better thermal conduction and highly resistant to corrosion, even after periods of inactivity
- Finger protection panel and emergency button for more safety
- Easy to use electronic control with pre-set ironing programmes
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse mode possible
- Space-saving wall model with front return of the linen
- Overheating check system with 2 temperature sensors
- Premix burner for more power and efficient ironing
- LED lights on the ironing width for good visibility and operation

TOLON

IRONERS

TFI 3516 · 3521

MODEL	UNIT		TFI 3516	TFI 3521
CAPACITY				
Roller diameter	mm		350	350
Working width	mm		1650	2100
Roller speed	m/min		1-7	1-7
Performance* (gas heated)	kg/h		68	85
ELECTRIC HEATING				
Electric heating power **	kW		24	30
Evaporation rate	l/h		18	25
Electric consumption	kW/h		25	31
GAS HEATING				
Gas heating power	kW		30	37
	Btu		102364	126249
Evaporation	l/h		26	34
Gas connection Ø	DN-BSP		20 (¾")	20 (¾")
Gas pressure	mbar		20	20
Gas consumption	kW/h		30	37
	Btu/h		102364	126249
Electric consumption	kW/h		1	1
VOLTAGE/ELECTRIC CONNECTION OPTIONS				
Electric			380 - 415V 3ph + N 50Hz 380 - 415V 3ph + N 60Hz 440 - 480V 3ph 50Hz 440 - 480V 3ph 60Hz	
Gas			380 - 415V 3ph + N 50Hz 380 - 415V 3ph + N 60Hz 440 - 480V 3ph 50Hz 440 - 480V 3ph 60Hz 200 - 240V 3ph 50Hz 200 - 240V 3ph 60Hz 200 - 240V 1ph 50/60Hz	
MOTORS				
Roller motor	kW		0,37	0,37
Fan motor	kW		0,75	0,75
EXHAUST				
Exhaust connection Ø	mm		110	110
Airflow	Electric	m³/h	410	410
	Gas	m³/h	410	410
DIMENSIONS (WxDxH)				
Net - Standard	Electric	mm	2524 x 990 x 1340	2944 x 990 x 1340
	Gas	mm	2524 x 990 x 1340	2944 x 990 x 1340
Packed - Standard	Electric	mm	2580 x 1010 x 1480	3000 x 1010 x 1480
	Gas	mm	2580 x 1010 x 1480	3000 x 1010 x 1480
WEIGHT				
Net - Standard	Electric	kg	725	800
	Gas	kg	685	735
Packed - Standard	Electric	kg	765	890
	Gas	kg	690	795
SOUND PRESSURE				
Sound level	db(A)		< 60	< 60

* Sheets 160 x 200 cm - 125 g/m²

** Output calculated at 380V/IIIphase

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

IRONERS

TFI 6026 · 6032



STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Gas or electric heating
- Extended heat transfer path
- Large surface contact with linen
- Roll standard with chrome surface coating for better thermal conduction and highly resistant to corrosion, even after periods of inactivity
- Finger protection panel and emergency button for more safety
- Easy to use electronic control with pre-set ironing programmes
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse mode possible
- Space-saving wall model with front return of the linen
- Overheating check system with 2 temperature sensors
- Premix burner for more power and efficient ironing
- LED lights on the ironing width for good visibility and operation

OPTIONS

- Longitudinal fold
- 3 folding sensors at feeding point instead of 1
- Transport wheels
- Rear output of the linen

TOLON

IRONERS

TFI 6026 • 6032

MODEL	UNIT	TFI 6026	TFI 6032
CAPACITY			
Roller diameter	mm	600	600
Working width	mm	2600	3200
Roller speed	m/min	3,5-12	3,5-12
Performance ^{1 2} (Electrical fold.)	kg/h	145-162	180-200
ELECTRIC HEATING			
Electric heating power ³	kW	56	69
	Btu	191080	235438
Evaporation rate	l/h	65	80
Electric consumption	kW/h	57,8	71
GAS HEATING			
Gas heating power	kW	65	80
	Btu	221789	272971
Evaporation rate (Electrical fold.)	l/h	80	100
Gas connection Ø	DN/BSP	20 (¾")	20 (¾")
Gas pressure	mbar	20-50	20-50
Gas consumption	kW/h	65	80
	Btu/h	221789	272971
VOLTAGE/ELECTRIC CONNECTION			
Electric heated models		380-415V 3ph + N 50Hz 380-415V 3ph + N 60Hz 440-480V 3ph 50Hz 440-480V 3ph 60Hz	
Gas heated models		380-415V 3ph + N 50Hz 380-415V 3ph + N 60Hz 440-480V 3ph 50Hz 440-480V 3ph 60Hz 200-240V 3ph 50Hz 200-240V 3ph 60Hz 200-240V 1ph 50/60Hz	
MOTORS			
Roller motor	kW	0,75	0,75
Fan motor	kW	1,1	1,1
EXHAUST			
Exhaust connection Ø	mm	125	125
Airflow	Electric	m³/h	1125
	Gas	m³/h	1125
DIMENSIONS (WxDxH)			
Net - Standard	mm	3488 x 1440 x 1727	4088 x 1440 x 1727
Net - Rear exit model	mm	3488 x 1647 x 1827	4088 x 1647 x 1827
Packed - Standard	mm	3550 x 1650 x 1917	4150 x 1650 x 1917
Packed - Rear exit model	mm	3550 x 1817 x 1917	4150 x 1817 x 1917
WEIGHT			
Net *	kg	1875	1950
Gross *	kg	1977	2160
SOUND PRESSURE			
Sound level	db(A)	< 65,6	< 65,6

¹ 50% moisture - folding at 9 m/min

² Output calculated at 380V/IIIphase

³ Output calculated at 380V / 3 phase

* Weight based on standard model with folder, gas heating

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.tolon.com

TOLON

TOWEL FOLDER

TTF 200




STANDARD FEATURES & BENEFITS

- High performance Towel Folder
- Folding capacity of 900 – 1250 towels / h
- Manual, automatic and continuous operation modes
- Counts towels per size which simplifies inventory count and guarantees maximum hygiene
- Standard reverse motor and assisting strips for quality folds
- Towel folder contains 3 folding lanes
- Output conveyor can be positioned in 4 different directions
- Fast and easy set-up of programs through the standard USB port on machine
- Transfers the folded towels to packing station by means of the flat-pack delivery conveyor
- Automatic measurement of the length of the linen

OPTIONS

- 4th folding lane
- 4 exit direction alternatives



TOLON

TOWEL FOLDER

TTF 200

MODEL	UNIT	TTF 200
CAPACITY		
Nominal capacity	pcs/h	1250
Operational capacity	pcs/h	~ 900
Towel size	min	450 x 600
	max	1200 x 2000
Number of folding lanes		3 (optional 4)
Folding number		2 x 2
ELECTRIC		
Motor Power	kW	1,5
Fuse	A	3 x 16
Cable	mm ²	4 x 2,5
AIR		
Air pressure	bar	6-8
Air consumption	l/min	350
Air connection	mm	10
DIMENSIONS (WxDxH)		
Net - Folder & conveyor	mm	2070 x 4770 x 1500
Packed - Towel Folder	mm	1500 x 3920 x 1520
Packed - Output conveyor	mm	600 x 2400 x 800
WEIGHT		
Net	kg	1100
Net - Output conveyor	kg	125
Packed	kg	1230
Packed - Output conveyor	kg	150
SOUND PRESSURE		
Sound level	db(A)	70

** Output calculated at 380V/IIIphase

RIGID WASHERS

TWR 10 • 15 • 18 • 24 • 28



STANDARD FEATURES & BENEFITS

- Freestanding, high spin washer
- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in 5 compartment frontal dispenser
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front and top panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated shaft for longer life due to less friction on sealing surfaces
- Highly flexible and freely programmable control with advanced vertical touchscreen for easy operation and perfect management of your laundry
- USB connection for quick data transfer and data editing on simple .csv format
- On screen photographic illustrated troubleshooting guide
- Progress bar for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles
- Plexi double glass protection against heat
- Accelerometer for perfect balancing
- Water inlet hoses
- Steam inlet hose

OPTIONS

- Dual heating (electric & steam) selectable through the control
- Stainless steel side panels
- Stainless steel back panel
- 3rd inlet valve for soft water
- High flow inlet valves for faster filling
- Pneumatic inlet valves for faster filling
- Pneumatic steam valve
- Chemical hold signal
- Coin box
- Central pay system

TOLON

RIGID WASHERS

TWR 10 · 15 · 18 · 24 · 28

MODEL	UNIT	TWR 10	TWR 15	TWR 18	TWR 24	TWR 28
CAPACITY						
Dry load	kg	10	15	18	24	28
Performance	kg/h	15	22,5	27	36	42
Cycle duration	min	30-45	30-45	30-45	30-45	30-45
DRUM						
Drum diameter	mm	630	630	630	700	700
Drum depth	mm	330	490	580	630	720
Drum volume	l	103	153	181	242	277
Wash speed	rpm	43	43	43	37	37
Extraction speed	M rpm	750	750	750	710	710
	L rpm	530	530	530	500	500
G-force	M	200	200	200	200	200
	L	100	100	100	100	100
DOOR						
Door opening Ø	mm	455	455	455	455	455
HEATING						
Electric	kW	9	15	18	21	24
Steam	bar	4-6	4-6	4-6	4-6	4-6
ELECTRIC						
Electric consumption*	kW/h	2,34	3,1	3,66	4,9	5,6
Motor	kW	1,1	1,1	1,5	2,2	2,2
STEAM						
Steam valve connection Ø	DN-BSP	15-½"	15-½"	15-½"	15-½"	15-½"
Steam pressure	kPa	400-600	400-600	400-600	400-600	400-600
Steam consumption	kg/cycle	5	7,5	9	12	14
AIR						
Air connection Ø	mm	optional / 8	optional / 8	optional / 8	optional / 8	optional / 8
WATER						
Inlet valve connection Ø	DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	kPa	200-400	200-400	200-400	200-400	200-400
Water flow	l/min	60	60	140	140	140
Water consumption*	c. l/cycle	39	58	68	78	89
	h. l/cycle	42	62	73	86	99
Drain valve con. Ø (outer)	mm	76	76	76	76	76
Drain flow	l/min	230	230	230	230	230
PROGRAMMABLE CONTROL						
New Vector Control		Std			Std	Std
DIMENSIONS (WxDxH)						
Net - Standard	mm	785 x 890 x 1285	785 x 1050 x 1285	785 x 1140 x 1285	869 x 1230 x 1390	869 x 1320 x 1390
Packed - Standard	mm	820 x 970 x 1425	820 x 1130 x 1425	820 x 1220 x 1425	910 x 1310 x 1535	910 x 1400 x 1390
WEIGHT						
Net - Standard	kg	290	300	310	440	450
SOUND PRESSURE						
Sound level	db(A)	55-65	55-65	55-65	55-65	55-65

* Consumption figures based on 'Eco 60°C' program (main wash, 2 rinses)



Progress Bar

A linear interactive light bar provides real-time visual indicator of the washing machine's status.

- Cycle Tracking
- Alarm Tracking
- Cycle Completion
- Payment Tracking



New Doorlock

New doorlocks come with the soft and hard mount models of TWE&TWR 10-15-18-24-28-40 as well as the upcoming TWE 8 model.

- Safety Compliance
- Enhanced Protection



Vector Control

Our brand-new Omron controller is implemented in new hard mount lines TWR 10-15-18-24-28-40, the upcoming TWE 8 and soon to be implemented in the rest of our product family.

The Omron HMI provides an intuitive user experience and powerful features.

- Touchscreen Interface
- Alarm Management
- Program Storage
- Program Import/Export
- Communication Options

The Omron Controller offers robust, scalable, and compliant automation for industrial applications.

- High Reliability
- Scalability
- Safety Compliance



Bubble Studio

Bubble Studio provides a comprehensive platform for creating and managing advanced washing machine programs. This tool simplifies complex configurations, providing a user-friendly interface for program and pricing customization. It will soon be reachable via bubblestudio.net.

- Customizable Program Sequences
- Machine Configuration
- Pricing Configuration

20 24

TOLON

Follow Us

   @tolonglobal

Stay Tuned

 tolon.com